




# SOLAR HYBRID INVERTER

EU-IN-3.6KW



- Built-in 100A Solar Charger
- Wide PV Input Voltage Range 40-500V
- Workable with Generator
- Complete CE Certificate
- BMS Support Lithium/Lead-acid Battery
- Lithium Battery Activation
- Detachable Dust Cover
- Feed-in to Grid

## System Diagram

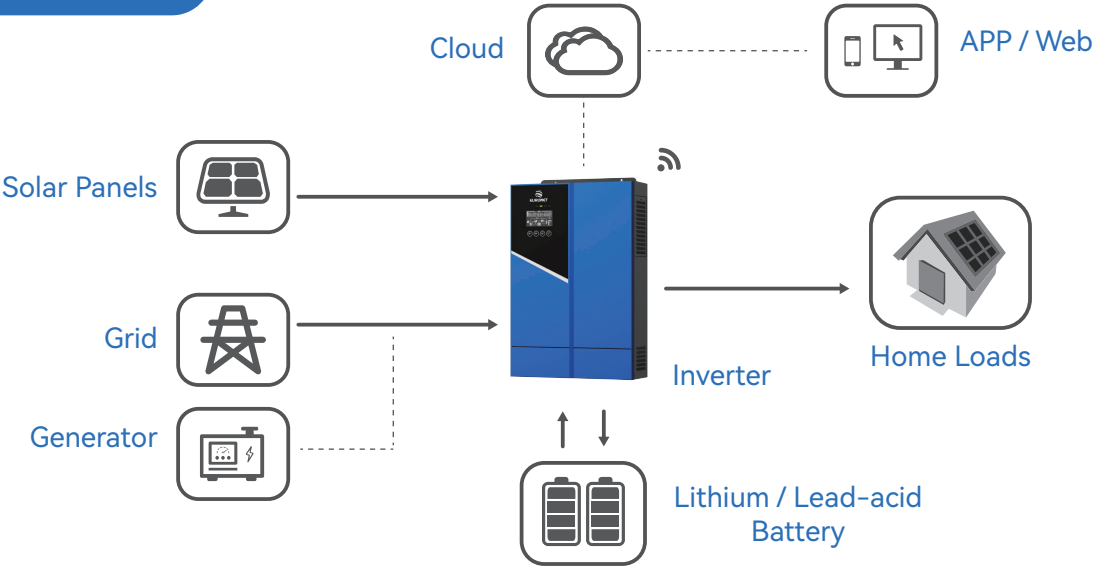

# SPECIFICATIONS



Model	EU-IN-3.6KW
<b>AC Input</b>	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
<b>AC Output</b>	
Rated Capacity (kW)	3.6
Surge Power (kVA)	5.7
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	60s@102%~110% load; 10s@110%~130% load; 3s@130%~150% load; 0.2s@>150% load
Max. Efficiency (Battery Mode)	92.7%@24VDC
Parallel Quantity	NA
<b>Charger (PV / AC)</b>	
Solar Charger Type	MPPT
Max PV input Current / Input Power	18A / 5000W
MPPT Range@Operating Voltage (VDC)	40~450
Max PV Open Circuit Voltage (VDC)	500
Max PV Charge Current (A)	100
Max AC Charge Current (A)	100
Max. Charge Current (PV + AC) (A)	100
<b>Battery</b>	
Rated Voltage (VDC)	24
Floating Charge Voltage (VDC)	27
Overcharge Protection (VDC)	30.5
Battery Type	Lithium and Lead-acid
<b>Interface</b>	
HMI	LCD
Interface	RS485 / RS232 / USB / Dry Contact
Monitoring	WiFi (Optional)
<b>General Data</b>	
Ingress Protection	IP21
Operating Temperature	-10 °C ~ 50 °C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15 °C ~ 60 °C
Net Weight (kg)	6.4
Dimensions (W*H*D)	420*284*94mm
Max. Operating Altitude	4000m (Derating above 1000m)




# SOLAR HYBRID INVERTER

EU-IN-5KW



- Built-in 80A Solar Charger
- Wide PV Input Voltage Range 120-500V
- Workable with Generator
- DUAL** Dual AC Output
- 9 Inverters in Parallel
- BMS** Support Lithium/Lead-acid Battery
- Lithium Battery Activation
- Detachable Dust Cover
- Feed-in to Grid
- WiFi Monitoring(optional)

## System Diagram

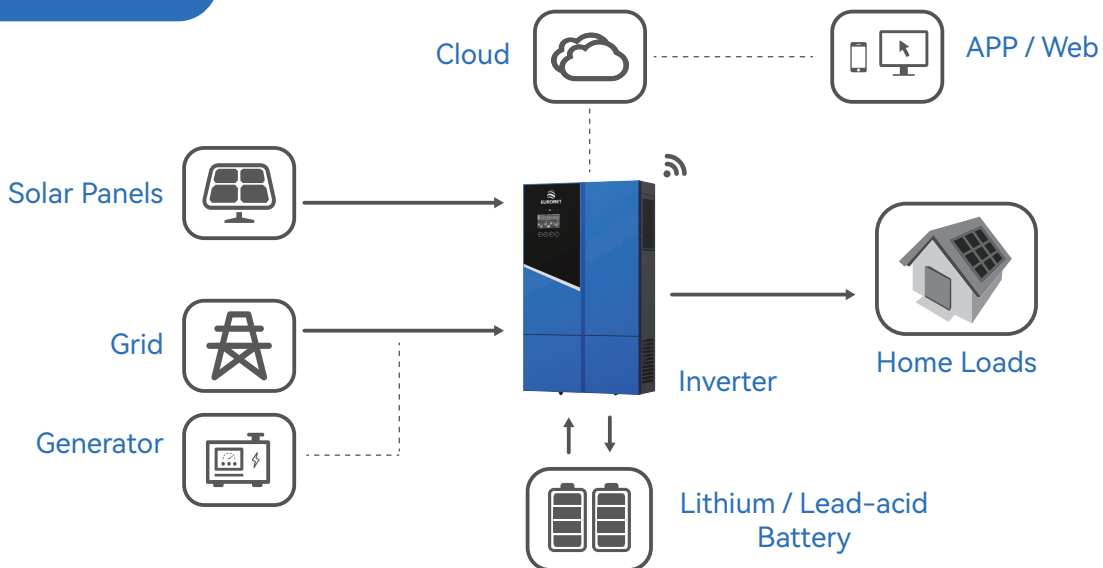

# SPECIFICATIONS



Model	EU-IN-5KW
<b>AC Input</b>	
Rated Input Voltage (VAC)	208 / 220 / 230 / 240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 / 60 (Auto Adaptive)
<b>AC Output</b>	
Rated Capacity (kW)	5
Surge Power (kVA)	10
Voltage (VAC)	208 / 220 / 230 / 240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	60s@102%~110% load; 10s@110%~130% load; 3s@130%~150% load; 0.2s@>150% load
Max. Efficiency (Battery Mode)	93%@48VDC
Parallel Quantity	9
<b>Charger (PV / AC)</b>	
Solar Charger Type	MPPT
Max PV Input Current / Input Power	18A / 6000W
MPPT Range@Operating Voltage (VDC)	120~450
Max PV Open Circuit Voltage (VDC)	500
Max PV Charge Current (A)	80
Max AC Charge Current (A)	80
Max. Charge Current (PV + AC) (A)	80
<b>Battery</b>	
Rated Voltage (VDC)	48
Floating Charge Voltage (VDC)	54
Overcharge Protection (VDC)	61
Battery Type	Lithium and Lead-acid
<b>Interface</b>	
HMI	LCD
Interface	RS485 / RS232 / USB / Dry Contact
Monitoring	WiFi (Optional)
<b>General Data</b>	
Ingress Protection	IP21
Operating Temperature	-10 °C ~ 50 °C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15 °C ~ 60 °C
Net Weight (kg)	9.5
Dimensions (W*H*D)	510*306*115mm (without bracket)
Max. Operating Altitude	4000m (Derating above 1000m)