

COMPLETE RANGE OF INDOOR & OUTDOO LIGHTS

SOLAR GARDEN LIGHT

www.euronetdxb.com



Features:

- Enables outdoor grilling at night.
- Provides increased safety after dark.
- It helps to thwart crime during night.
- Useful during seasons when it gets
- · darker earlier.
- Enables to see how to get from one
- location to another.
- Helps to create comfortable and communal surroundings.
- Creates a warm welcome when family and guests enter the front door.
- Highlights and adds drama to interesting landscape or architectural features.



TECHNICAL SPECIFICATIONS





ACCESSORIES

GENERAL Specifications	
Item Name	Solar Garden Light
Light source	LED lamp
Light Type	LED lamp
Solar Panel	2.2W
Cell Type	Li-Battery
Solar Panel	2.2W
Light Source	1w Super Bright LED
Switch	ON/OFF
Working Time	12-20 Hrs
Illumination Time	8h
Voltage	3.6V
Battery Capacity	3.7/2500mAh
Charging Time	6-8 Hrs
IP Grade	IP65
Main Material LampShade	Acrylic
Base	Stainless Steel

Benefits of Using Energy-Efficient Outdoor Lighting For Your Business

- Enhanced energy efficiency
- 🌡 Reduced carbon emissions
- 🌡 Reduced light pollution
- Increased public safety
- 🌡 Improved Appearance

Benefits of Installing Outddoor Lighting

Your Home

Lighting your home's structure allows you to extend the beauty of your home in the dark of night when it would otherwise be obsured

Your Lanscaping

Landscape lighting is used to illuminate standout features, such as trees, sculptures or water features, as well as around garden and pathways

Your Safety

A well-planned outdoor lighting scheme should include all the light necessary to move safely around your property at night

Your Security

Criminals are less likely to approach as well-lit home where they can be seen. The more you can eliminate dark corners, the more secure your home will be.

ELECTRIC HANGING LIGHT

www.euronetdxb.com



Features:

- Eco-Friendly
- Long Lifespan
- Energy efficiency
- Low radiated heat
- Directional lighting
- Exceptional colour range
- Instantaneous illumination
- Reliability & Compact in Size
- High brightness and intensity • Superior Color Rendering Accuracy
- Function in Cold and Hot Temperatures



TECHNICAL SPECIFICATIONS





Item No.	Power	LED Source	Input Voltage	Frequency	Withstand voltage	IP	PF	Lumen	RA	Color Temperature	Beam Angle	Lifespan	Dimension (MM)
EU FL 150W	150W	216 PCS-2835	DOB 100-265V	50/60HZ	1500V	IP65	>0.5	105- 115 LM/W	>80	6500K	90°	35000 hrs	Ф 310* 83
EU FL 200W	200W	288 PCS-2835	DOB 100-265V	50/60HZ	1500V	IP65	>0.5	105- 115 LM/W	>80	6500K	90°	35000 hrs	Ф 377* 83

Item No.	Power	LED Source	Input Voltage	Frequency	Withstand voltage	Surge	IP	PF	Lumen	RA	Color Temperature	Beam Angle	Lifespan	Dimension (MM)
EU HL 100W - G	100W	125 PCS-2835	Non-isolated 100-265V	50/60HZ	1500V	4KV	IP65	>0.5	110- 120 LM/W	>80	6500K	90°	35000 hrs	Φ 270* 115
EU HL 150W - G	150W	200 PCS-2835	Non-isolated 100-265V	50/60HZ	1500V	4KV	IP65	>0.5	110- 120 LM/W	>80	6500K	90°	35000 hrs	Ф 300* 120
EU HL 200W - G	200W	250 PCS-2835	Non-isolated 100-265V	50/60HZ	1500V	4KV	IP65	>0.5	110- 120 LM/W	>80	6500K	90°	35000 hrs	Ф 350* 130





ELECTRIC CEILING LIGHT

www.euronetdxb.com



Features:

- Good lighting ability
- Power saving, durable
- Variety in color selection
- Environmentally friendly
- Reliability & Compact in Size
- High brightness and intensity
- Superior Color Rendering Accuracy
- Create a luxurious, sophisticated space
- Function in Cold and Hot Temperatures



TECHNICAL SPECIFICATIONS

Item No.	Power	LED Source	Input Voltage	Frequency	Withstand voltage	Surge	IP	PF	Lumen	RA	Color Temperature	Beam Angle	Lifespan	Dimension (MM)
EU ECL - 200W	200W	120*2 PCS-3030	Isolated 100-265V Meanwell Driver	50/60HZ	1500V	6KV	IP66	>0.9	120- 130 LM/W	>80	6500K	90°	50000 hrs	410*220*45
EU ECL - 300W	300W	120*3 PCS-3030	Isolated 100-265V Meanwell Driver	50/60HZ	1500V	6KV	IP66	>0.9	120- 130 LM/W	>80	6500K	90°	50000 hrs	410*312*45
EU ECL - 500W	500W	120*5 PCS-3030	Isolated 100-265V Meanwell Driver	50/60HZ	1500V	6KV	IP66	>0.9	120- 130 LM/W	>80	6500K	90°	50000 hrs	410*508*45
EU ECL - 1000W	1000W	120*10 PCS-3030	Isolated 100-265V Meanwell Driver	50/60HZ	1500V	6KV	IP66	>0.9	120- 130 LM/W	>80	6500K	90°	50000 hrs	760*508*45



www.euronetdxb.com



Features:

- Unique optical and lamp design,
- Safe, reliable and excellent brightness.
- Using high quality LED chip with low light decay,
- Low power consumption, high luminous efficiency, and more energy-saving than regular lighting
- Quick switch, no strobe, no radiation and longer product life up to 30000 hours.



TECHNICAL SPECIFICATIONS



MODEL	EURO - E111	EURO - E222	EURO - E333						
Watt	10W	5W	10W						
Lighting Hours	6H	8H	6H						
Time to full Charge	12H	20H	12H						
CCT	8000~ 10000K								
Voltage	AC170-240V 50/60Hz								
Battery Capacity	1700mAh, 8V	2500mAh, 8V	1700mAh, 8V						
Temperature	From 20°C to + 50°C								

www.euronetdxb.com



Model: E-8001

Hammered Matel Lens


Warm White 3000K LED



NO WIRING REQUIRED





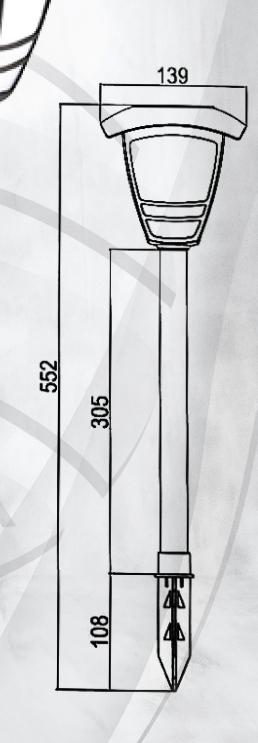



Model: E-8002

Hammered Matel Lens

Warm White 3000K LED



NO WIRING REQUIRED







SOLAR PATHWAY LIGHT

www.euronetdxb.com



Model: E-8003

Hammered Matel Lens

Warm White 3000K LED



NO WIRING REQUIRED









Model: E-8004



Rechargeable Battery Included



Years Limited Warranty



LUMENS Light output (Lumens rated at peak output)



HOURS Operating time on average sunny day charge



Warm White 3000K LED



NO WIRING REQUIRED



NO TOOLS REQUIRED

Hammered Matel Lens

Warm White 3000K LED




NO WIRING REQUIRED







Model: E-8005




Warm White 3000K LED



NO WIRING REQUIRED



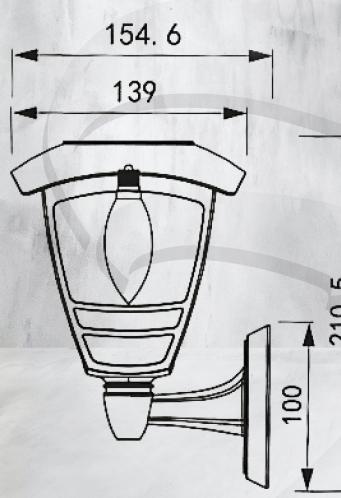



SOLAR PATHWAY LIGHT

www.euronetdxb.com



277

Model: E-8006



SOLAR PATHWAY LIGHT

www.euronetdxb.com



Model: E-8007



1 Years 8 LUMENS Light output 8 HOURS Operating time

CURONCT

SOLAR RECHARGEABLE LIGHT

www.euronetdxb.com



Model: 4330s / 4331s

Product's Characteristics:

- 1. Bullt in with capacity 800mah rechargeable maintenance free-aid battery.
- 2. The battery has tong life. and the numbers of discharge of the battery is up to 250 times
- 3. Use pcs 1W high LED light and 8 pcs 0.3W LED which has long life. low power consumption and white light.
- 4. Solar panel: 0.2W







Model: 5W, 7W, 9W

Features:

- Dimmable Led Bulb
- Flicker-free lighting
- Low power consumption
- Led Light With An A+ Energy Label
- Connects to any regular bulb holder
- 4 times longer life compared to normal bulb
- LED bulbs use 80% less energy than normal bulbs







Model: 9W, 18W

CURONET

SOLVE TEO FIGHT

⇒ EURONET

SOLVE LED LIGHT



Features:

- High level of brightne
- Low consumption of energy
- Low generation of heat

Certificate

Standard ISO 9001:2015

Certificate Registr. No. 01 100 2122578/01

Organization:



Smart Euronet Electronics LLC

Shop No 2&3, Al Shams Building, Naif Satellite Market,

Behind Naif Park, Deira,

Dubai,

United Arab Emirates

Site: c/o Smart Euronet Electronics LLC

Shop No 2&3, Al Shams Building, Naif Satellite Market,

Behind Naif Park, Deira,

Dubai,

United Arab Emirates

Scope: Trading of Refrigerators, Washing machines & Household

Electrical Appliances, Satellite receiving Equipment, Solar Energy Systems & Components, Security control & Alarm Equipment,

Electrical & Electronic Appliances Spare parts

Proof has been furnished by means of an audit that the

requirements of ISO 9001:2015 are met.

Validity: The certificate is valid in conjunction with the main certificate 01

100 2122578 from 2021-07-26 until 2024-07-25.

2021-08-03

TÜV Rheinland Cert GmbH Am Grauen Stein · 51105 Köln









SMART EURONET ELECTRONICS LLC

Naif Electronic Market, Deira, Dubai - United Arab Emirates www.euronetdxb.com euronetdxb@gmail.com (@smarteuronet)











