



EURONET

SOLAR PANEL USB CHARGER

Features:



- High Efficiency
- Safe & Portable
- Environmental & Water Proof
- Solar Cell: Polycrystalline Silicom
- High Conversation Rate
- High Light Transmittance
- Max Current : 900mA



With 4 in 1 Discharging Cable

For All Mobile phones ,
Digital products,
Rechargeable Lamps &
Fans, Radio etc.....

Model No: **EUR M-C8W**



HOW IT WORKS EFFICIENTLY

Place the solar panel in a sunny place, adjust the panel to maximize the power
(let the panel be at an angle of 45-90 degrees to the sunlight)

Connect the solar panel to your device using the the multi head USB cable.




OUTDOOR WIRELESS BRIDGE

Features:

- Wide Applicability
- Reliable & Lasting
- Low power consumption
- Easy Setup & Power Efficient
- Suitable for factories, malls, elevators etc
- Better Wireless Signal Transmitting and Receiving

WIRELESS NETWORK MONITORING VIDEO SOLUTION 2.4G 300M HIGH-PERFORMANCE CPE

RATE: 300M
TRANSMISSION DISTANCE: 2 KM
POE IN: 24V \equiv 0.5A

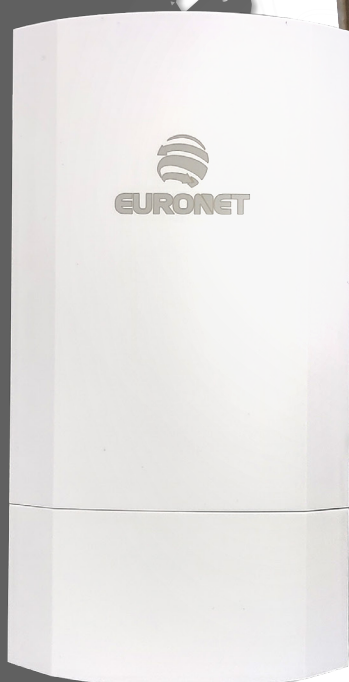

INDUSTRIAL MEDIA CONVERTER

Features:

- Optical Port: SC
- Transmission Distance: 3km
- A Device Port: 1*SC(1000Mbps) 4*RJ45(1000Mbps)
- B Device Port: 4*SC(1000Mbps) 1*RJ45(1000Mbps)
- Power Input: DC 5-12V 5W
- SN: 3KM-1V4-GE2204000043



Model	3KM-1V4-GE
Protocol Standard	IEEE802.3z/ab
Network Interface	RJ45 10/100/ 1000Mbps Self Adaption Transmission Distance: 100m
Fibre Interface	Single Mode SC/PC Optical Fiber Type: Single Mode 9/125μm 1310T/1550R Transmission Rate: 1000Mbps Transmission Distance: ≤3KM Forwarding Mode: Store Forward
Performance & Specification	Transfer Mode: Full Duplex/Full Duplex Automatic Connection Network Latency:≤150ps
Power	Power Type: External Power Power input DC5V1A or12V0.4A DC Socket: 2.5x5.0mm
Working Environment	Storage Temperature:-30~75°C Storage Temperature:-10°C~55°C
Physical Specifications	Size : 70*26*93mm Fuselage Color: Silver
Packaging Specifications	Packaging: 245 x 145 x 56 mm 1 Pair/ Box 510* 300*310 20 Pair / Box

H.265+ IP CAMERA DECODER



Features:

- Unlimited number of channels
- PC/NVR/DVR hybrid access
- 4K ultra clear output
- Support video camera decoding
- Compatible with H.265/264



Model No EN7016

Description: 16CH 5.0MP IP Decoder

Compression Grade:

H.265+ with HDMI and VGA output

Power input: DC12V 1A





EURONET

HDMI 2.0

Features:

- Easy Installation
- Easy To Plug and Play
- Compact and user-friendly design
- Small, Light Weight Convenient To Use
- Digital high definition of your video and audio all in one cable



HDMI 2.0

Model No: HDMI 4K

1.5M | 3M | 10M | 20M | 30M | 50M | 100M

Support 3D Audio (32 CH)

Bandwidth : 18Gbps (4k@60Hz)

Male to male (Pure Copper, Gold Plate)

HDCP
2.2

3D
Blue-ray

4K
UHD

HDR
ARC

18G
bps





EURONET

SOLAR POWER BANK

Features:

- Available in lengths
- VCompatible with all USB
- No additional power is required
- Lightweight hybrid of fiber and copper
- Solution for video conferencing cameras, video capture

MODEL: EURO POWER BOX
4mm | 6mm | 10mm



**6000 mAH
BATTERY**



**USB MICRO
CHARGE**

1^{LED} & 4^{SMD}

**MAXIMUM
LIGHTING TIME 50H**



TORCH



**POWER
INDICATOR**





EURONET

FREE WELDING OPTICAL FIBRE

Features:

- High Backup
- USB Charging Port
- Emergency Power Bank.
- Rechargeable Multifunctional Light
- Solar Panel For Out Door Emergency Charging



ADAPTER CONNECTOR: SC-SC
Single-mode Double-core
Length: 50m

MODEL NO
FIBRE OPTIC 50-M
FIBRE OPTIC 100-M

EURONET

- Single model single core
- Single model dual core
- Dual core+power cable

Plug and play fiber (50~300m)

Welding Free Optical Fiber

10 Times docking no packet loss,
Fly up to 10 km

ACCESS CONTROL - 7613

Features

- Waterproof, conforms to IP65 / IP68
- Strong Zinc Alloy Electroplated anti-vandal case
- Full programming from the keypad
- 2000 users, supports Card, PIN, Card + PIN
- Can be used as a stand alone keypad
- Backlight keys
- Wiegand 26 input for connection to external reader.
- Wiegand 26 output for connection to a controller
- Adjustable Door Output time, Alarm time, Door Open time
- Very low power consumption (30mA)
- Fast operating speed, <20ms with 2000 users
- Lock output current short circuit protection
- Easy to install and programme
- Built in buzzer
- Red, Yellow and Green LEDs display the working status



- **WaterProof**
- **Backlight touch keypad**
- **Metal case, anti-vandal**
- **Wg26 Input/Output**
- **2000cards/codes**

Specifications

Operating Voltage	DC12V
User Capacity	2000
Card Reading Distance	3-6 Cm
Active Current	<60mA
Idle Current	25±5 mA
Lock Output Load	Max 1A
Operating Temperature	45 ~60C
Operating Humidity	10%- 90% RH
Waterproof Degree	IP65/IP68
Adjustable Door Relay time	0-99 seconds
Wiegand Interface	Wiegand 26 bit
Wiring Connections	Electric Lock, Exit Button, External Alarm

ACCESS CONTROL - 7612

- **Backlight touch keypad**
- **Metal case, anti-vandal**
- **Wg26 Input/Output**
- **2000cards/codes**



Features

Ultra-low Power	Standby current is less than 30mA
Wiegand Interface	WG26 or WG34 input and output
Searching time	Less than 0.1s after reading card
Backlight keypad	Operate easily at night
Doorbell interface	Support external wired doorbell
Access ways	Card, Pin code, Card & Pin code
Independent codes	Use codes without related card
Change codes	Users can change codes by themselves
Delete users by card No.	The lost card can be delete by keyboard

Specifications

Working Voltage: DG12V	Standby Current: <30mA
Card Reading Distanos: 2 ~ 5cm	Capacity: 2000 users
Working Tempguatare -40°C ~60°C	Working Humidity: 10% ~90%
Lock output load: ≤3A	Door Relay time. 0~99S (Adjustable)

WIRELESS SIREN



Features:

- Low temperature heat resistance
- Make Sound & Light When Triggered
- Built-in backup lasting rechargeable battery
- Fits for residential, shop, factory, warehouse, department store and offices.
- Easy and simple to use, easy to install with included installation accessories

Wireless Frequency: 433 MHz

Sound Level: 120 dB

Power Supply: DC9-12V

Backup Battery: Ni-Hi AAA*6 DC7.2V

Open Distance : 50-100 meters (Open area)

Installation: Wall-mound

The Next Generation
ALARM
System
Home & Business



MAGNETIC LOCK




Features:

- Fire resistant
- Durable body structure
- Suitable for all type doors
- Suitable for Access systems
- Suitable for right and left doors
- Used where high security is required
- Suitable for metal, wood and glass doors



Anti-Residual Magnetism Designed
5 Wire 280kg/600LBS
Single Door Lock
Door Status

MS-280-W5



Features:

- High voltage test rating
- Resistant to Impact , tear & abrasion
- Suitable to common connector types
- Maximum conductor temperature of operation
- Outdoor durability resists extreme temperatures
- Resistant to Weather , mineral oils , acids & alkaline
- UV resistance: full protection against ultraviolet rays
- Flexibility and stripability for fast and easy installation
- Longtime reliability lasts even under tough external conditions
- Fully recyclable in accordance with new environmental regulations

**Technical Specifications****XLPO DOUBLE INSULATED CABLE**

- Cable Size : 1 X6.0 sq.mm (TINNED COPPER)
- Rated Voltage: 1500V (TUV) 600V (UL)
- Temperature Range: -40°C TO 120°C
- Ingress Protection: IP67
- Length : 100 METERS

**BLACK & RED****4MM | 6MM | 10MM****100 Meter**

SOLAR CONNECTOR



Features:

- Ready for field assembly
- Meets all new industry standards
- Highest current rating in industry
- Long-term UV and Ozone resistance
- Quick and easy secure snap-lock mating
- No assembly required, no small parts to lose
- Low contact resistance means low power loss
- Simple unlocking tool meets NEC requirements
- Withstands hydrolysis, oil, chemicals, abrasion, corrosion, and extreme temperatures



MODELS

1/2

1/3

1/4



Plug and Play

Connection - putting the male and female connectors facing each other and pushing in.

Separation - pressing the two sides of the built-in lock and pulling the Male and Female connectors.

IP67 Waterproof

Fire-resistant PPO

Tin Plated Copper



FAST ASSEMBLY



PPO INSULATION



IP68 WATERPROOF



TUV CERTIFIED